

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018382 A2

(51) International Patent Classification⁷: **C04B 28/26**

(21) International Application Number:
PCT/NL2003/000594

(22) International Filing Date: 22 August 2003 (22.08.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1021323 23 August 2002 (23.08.2002) NL

(71) Applicant (*for all designated States except US*): **MOD-
INA B.V.** [NL/NL]; Korvetweg 16, NL-6222 NE Maas-
tricht (NL).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **PRICK, Raoul,
Guilielmus, Boudewijn, Marie** [NL/NL]; Bemelerweg
20, NL-6226 HA Maastricht (NL).

(74) Agents: **BLOKLAND, Arie et al.**; Algemeen Octrooi-
en Merkenbureau, P.O. Box 645, NL-5600 AP Eindhoven
(NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: METHOD OF PREPARING A SILICATE-BASED FOAM, FOAM OBTAINED BY USING SUCH A METHOD AS
WELL AS THE USE THEREOF

(57) Abstract: The present invention relates to a method of preparing a silicate-based foam, a foam obtained by using such a method
as well as the use thereof. The object of the present invention is to provide a silicate-based foam, which foam has a short drying time
and which can be worked after a short time already.

WO 2004/018382 A2

Method of preparing a silicate-based foam, foam obtained by using such a method as well as the use thereof.

DESCRIPTION

5 The present invention relates to a method of preparing a silicate-based foam, to a foam obtained by using such a method as well as to the use thereof.

10 The method referred to in the introduction is known per se from US patent No 4,960,621, wherein an inorganic, non-combustible foam is applied to a surface to be rendered fire-retardant. The method that is known therefrom comprises the provision of two separate packages, viz. a package comprising about 64% of sodium silicate having an $\text{SiO}_2/\text{Na}_2\text{O}$ ratio of about 2.9, and another package comprising about 8% sodium silico fluoride and about 20% of a filler, after which the contents of the two
15 separate packages are mixed and the mixed contents are applied to said surface, with the obtained mixture having a volume six to ten times that of the added volumes of the packaged contents. One drawback of the method that is known therefrom is the fact that two separate packages are required at all times, with one package comprising a relatively costly
20 filler. In addition, said US patent does not provide any further details with regard to the mixing of the contents of the two separate packages. In addition to that, a foam having a fixed composition is obtained at all times.

25 The object of the present invention is to provide a silicate-based foam, which foam has a short drying time and which can be worked after a short time already.

 Another object of the present invention is to provide a method of preparing a silicate-based foam, the nature of said foam being such that the surface to which the foam is applied will not undergo any deformation.

 Yet another object of the present invention is to provide a

foam which significantly reduces the PCS-value, viz. the amount of energy that is released upon combustion, of organic materials for the purpose of rendering organic materials that have been treated with the present foam fire-resistant.

5 Yet another object of the present invention is to provide a foam which is applied to a surface in such a manner that the foam will not fully penetrate into the object to be impregnated, as a result of which the impregnated object will retain its original, flexible characteristics.

10 Another object of the present invention is to provide a foam which can be used as an adhesive, with a small amount of foam providing sufficient adhesive power.

According to the present invention, the method as referred to in the introduction is characterized in that silicate is supplied to a mixer under pressure, to which mixer also a carrier gas is supplied under pressure, with intense mixing of the silicate and the carrier gas being effected in the mixer, after which a foam of carrier gas and silicate is delivered via an outlet opening of the mixer.

15 As a result of said intense mixing of silicate and carrier gas in the mixer, a strong and full foam is obtained, so that the aforesaid objectives are accomplished.

The carrier gas that can be used in the present invention is selected from a group consisting of oxygen, nitrogen, air, carbon dioxide and carbon monoxide, or a combination of one or more thereof.

25 Preferably, air is used as the carrier gas, because such a carrier gas is available in large amounts at a low price.

The silicate compound that can be used in the present invention may be selected from the group consisting of sodium, potassium and magnesium silicates, with the possible addition of other silicate compounds that are known to those skilled in the art. Sodium silicate (water glass) is especially preferred, because it will provide a strong

30

foam. Water glass is a member of the family of soluble sodium silicate compounds. The formula of sodium silicate varies from $\text{Na}_2\text{O}_3 \cdot \text{SiO}_2$ to $2 \text{Na}_2\text{OSiO}_2$, depending on the amounts of water being used. Two processes are known for preparing water glass, viz. the furnace process and the hydrothermal process, which two processes are extensively described in the literature, so that they need not be explained in more detail herein.

In order to give the obtained foam additional properties, for example in order to increase the fire-resistance thereof or in order to obtain an increased adhesive power, one or more additives selected from the group consisting of surfactants, colorants, aromatics, foam stabilising agents, cleaning agents, fire resistance- increasing agents, insecticides, acids and bonding agents may be added to the silicate.

It is in particular preferable to use one or more surfactants in order to effect an intense mixing of silicates and carrier gas in the mixer, which surfactants reduce the interface tension between carrier gas and silicates, as a result of which a proper mixing of the two flows will occur.

In order to obtain a proper mixing of silicate and carrier gas, it is preferable to use a tubular mixer, so that a sufficiently long residence time for effecting an intense mixing of the two components is ensured.

In addition to that, the mixer is preferably internally provided with obstruction means, which effect an intense mixing of silicate and carrier gas. Baffle plates or packing materials, such as Raschig rings, can be mentioned as suitable obstruction means.

The present mixer, which is preferably tubular as mentioned above, is provided with the carrier gas, preferably compressed air being under a pressure of about 7-8 bar, at one end thereof. Said compressed air is supplied to the mixer via a compressor provided with a reducing valve, with the amount being supplied to the mixer being controlled via a metering valve. The present mixer is preferably provided with obstruction

means, so that an intense contact with the silicate that is likewise being supplied to the mixer is effected. The supply of silicate preferably takes place downstream of the location where the metering of the carrier gas takes place, with the liquid silicate, to which one or more additives, preferably surfactants, may have been added, being supplied at a pressure of about 5-60 bar to the mixer via a pump provided with a frequency controller and a metering valve. The obstruction means present in the interior of the mixer effect an intense mixing of silicate mixture and carrier gas, as a result of which a foam is obtained at the other end of the mixer, in which an outlet opening is present, which foam has undergone a volume increase of the order of about 5-25 times the original volume of the silicate mixture.

The present invention in particular relates to a foam with a base of carrier gas and silicate.

The use of foam silicate has a number of advantages, such as the fact that very precise metering of foam is possible and that it is possible to control the composition of the foam being formed. Moreover, a short drying time is obtained as a result of the presence of carrier gas. In addition to that, large volumes of foam can be obtained, with the storage capacity of the original silicate mixture only amounting to 1-25 of the foam silicate volume. Another important industrial advantage is the fact that the present application apparatus for paste-like or viscous raw materials can be used for the present method without any complex constructional adaptations being required.

As already mentioned before, the carrier gas for the present foam has been selected from the group consisting of oxygen, nitrogen, air, carbon dioxide and carbon monoxide, with air preferably being used as the carrier gas. Especially sodium silicate is used as the silicate compound.

In order to give the obtained foam a number of additional properties, the foam preferably contains one or more additives selected

from the group consisting of surfactants, colorants, aromatics, foam stabilising agents, cleaning agents, fire resistance-increasing agents, insecticides, acids and bonding agents.

The present foam may be used as an adhesive, for example.

5 The present foam provides many advantages, in particular when glueing on porous materials. The amount of adhesive is thus minimised, whilst the adhesive layer is nevertheless sufficiently thick to allow the adhesive to penetrate the pores of the material. If the present foam is used on impregnable materials, such as paper, cotton, non-woven materials and the like, the natural properties of silicate, with the possible addition of
10 special additives, give such materials fire-retarding and moisture-repelling properties, without said materials becoming unmanageable, i.e. stiffer. In such an application, an essential difference between the known liquid silicate compounds and the present foam can be easily demonstrated. For example, when paper is treated with liquid silicate, as
15 is usual in the prior art, the liquid silicate will fully penetrate the pores of the paper, after which it is no longer possible after some time to roll up the paper that has thus been treated. The paper has become stiff as a result of said treatment. The paper that has been treated with
20 the present foam, on the other hand, will remain flexible because of the fact that the impregnated paper is not saturated with the foam material. The present applicant assumes that the foam silicate comprises small interspaces containing the carrier gas, which prevents the formation of a closed network of silicate, although the present applicant by no means
25 wishes to be bound by such a theory.

Another application of the present foam is the use thereof as a fire retardant. Since the present foam comprises confined water molecules, an additional cooling effect will be provided in case of a fire, as a result of which the impregnated material will have a better
30 PCS-value than in the situation in which no foam is used.

Yet another application of the present foam is the use

thereof as an agent for obtaining moisture resistance. Although the use of silicate as a moisture repellent is known, for example from US patent No 5,460,864, the special use of a foam is not known therefrom. A special advantage obtained with the present foam is the fact that paper that has been treated with the foam will retain its inherent flexible characteristics, so that the treated material will not deform.

In a special embodiment it is also possible to use the present foam as a binder, for example for fibres and/or granulates, such as mineral wool plates or blankets, ceramic plates or blankets, cellulose plate material or blankets, building blocks made of peat and chipboard. An advantage of the use of foam as a binder is the small amount of energy that is required for drying the material.

The present invention will be explained hereinafter by means of an example, in which connection it is noted that the present invention is by no means limited to such a special example, but that the example is solely given by way of illustration.

The appended Figure schematically shows the present invention.

A storage vessel 1 containing silicate (for example sodium silicate, marketed by Silmaco, Lanaken, the Netherlands) is connected to a mixer 4, to which mixer 4 also a carrier gas from the container 2 is supplied. The container 2 is a compressed air cylinder, for example. The mixer 4 is internally provided with obstruction means (not shown). One or more additives from the container 3 may be added to the mixer 4. In a special embodiment it is also possible to meter one or more additives directly to the container 1, so that mixing of the additives already takes place in the container 1. For the sake of clarity, the required pumps and pressure valves, reducing valves and flow meters are not shown in the present schematic representation. The use of such equipment will be apparent to those skilled in this field of the art, however. Intense mixing of silicate and carrier gas takes place in the mixer 4, after

7

which the foam formed in the mixer 4 is discharged to the application 5, for example as an adhesive, a fire retardant, a moisture repellent, a binder or an impregnating agent.

5

CLAIMS

1. A method of preparing a silicate-based foam, characterized in that silicate is supplied to a mixer under pressure, to which mixer
5 also a carrier gas is supplied under pressure, with intense mixing of the silicate and the carrier gas being effected in the mixer, after which a foam of carrier gas and silicate is delivered via an outlet opening of the mixer.
2. A method according to claim 1, characterized in that the
10 carrier gas is selected from a group consisting of oxygen, nitrogen, air, carbon dioxide and carbon monoxide, or a combination of one or more thereof.
3. A method according to claim 2, characterized in that air is used as the carrier gas.
- 15 4. A method according to any one or more of the preceding claims, characterized in that sodium silicate is used as the silicate.
5. A method according to any one or more of the preceding claims, characterized in that one or more additives selected from the group consisting of surfactants, colorants, aromatics, foam stabilising
20 agents, cleaning agents, fire resistance-increasing agents, insecticides, acids and bonding agents are added to the silicate.
6. A method according to claim 5, characterized in that one or more surfactants are used.
7. A method according to any one or more of the preceding
25 claims, characterized in that the mixer is tubular.
8. A method according to any one or more of the preceding claims, characterized in that the mixer is internally provided with obstruction means, which effect an intense mixing of silicate and carrier gas.
- 30 9. A method according to any one of the preceding claims, characterized in that the metering of silicate takes place downstream of

the location where the metering of the carrier gas takes place.

10. A foam obtained by carrying out the method as defined in any one or more of the preceding claims.

11. A foam with a base of a carrier gas and a silicate.

5 12. A foam according to claim 11, characterized in that the carrier gas has been selected from the group consisting of oxygen, nitrogen, air, carbon dioxide and carbon monoxide or a combination of one or more thereof.

10 13. A foam according to claim 12, characterized in that air is used as the carrier gas.

14. A foam according to any one or more of the preceding claims 11-13, characterized in that sodium silicate is used as the silicate.

15 15. A foam according to any one or more of the preceding claims 11-14, characterized in that the foam furthermore contains one or more additives selected from the group consisting of surfactants, colorants, aromatics, foam stabilising agents, cleaning agents, fire resistance-increasing agents, insecticides, acids and bonding agents.


16. Use of a foam according to any one or more of the preceding claims 10-15 as an adhesive.

20 17. Use of a foam according to any one or more of the preceding claims 10-15 as a fire retardant.

18. Use of a foam according to any one or more of the preceding claims 10-15 as a moisture repellent.

25 19. Use of a foam according to any one or more of the preceding claims 10-15 as a binder.

20. Use of a foam according to any one or more of the preceding claims 10-15 as an impregnating agent.

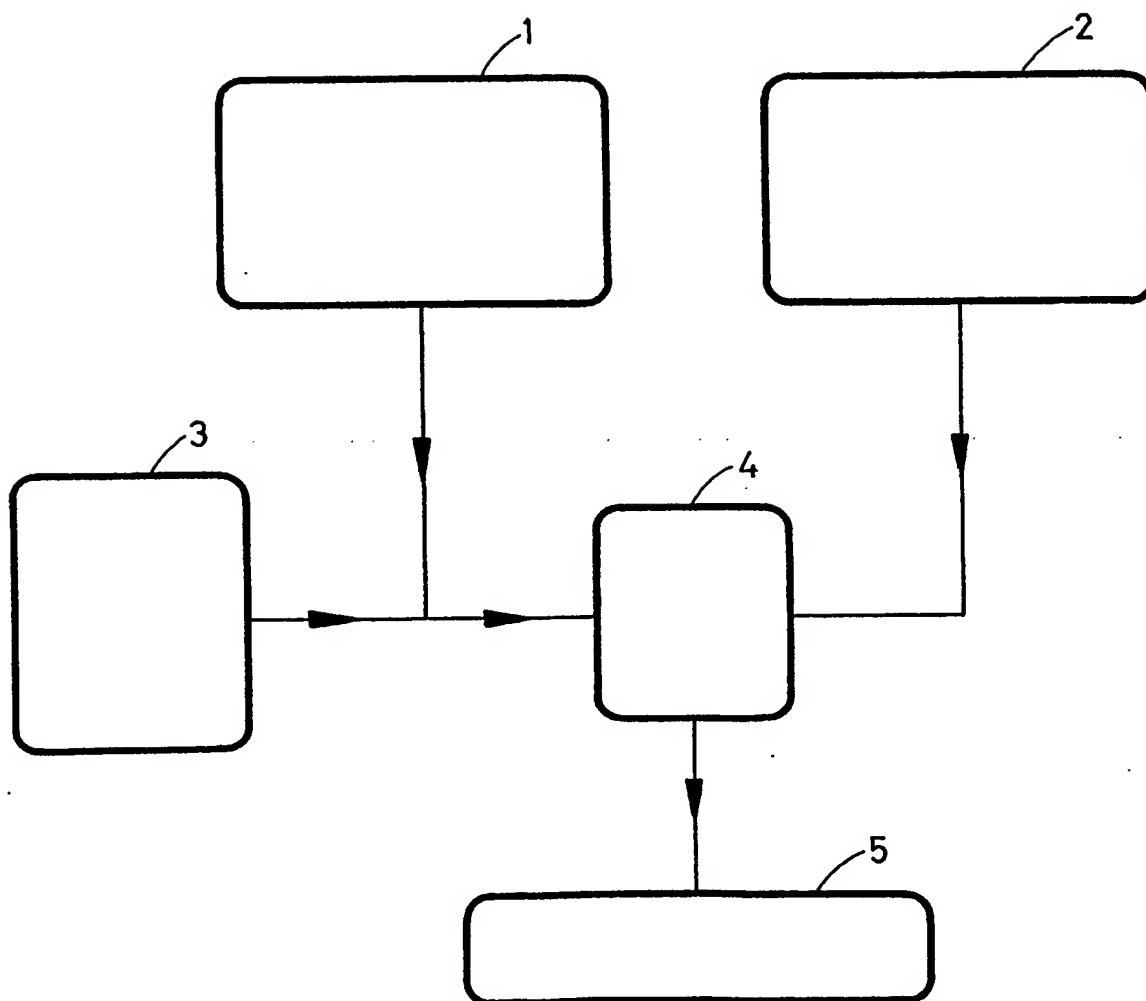

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018382 A3

(51) International Patent Classification⁷: **C04B 28/26**,
38/10, B01F 5/04, 3/04, B28C 5/02, 5/06

(21) International Application Number:
PCT/NL2003/000594

(22) International Filing Date: 22 August 2003 (22.08.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1021323 23 August 2002 (23.08.2002) NL

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): MOD-INA B.V. [NL/NL]; Korvetweg 16, NL-6222 NE Maastricht (NL).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): PRICK, Raoul, Guilielmus, Boudewijn, Marie [NL/NL]; Bemelerweg 20, NL-6226 HA Maastricht (NL).

(74) Agents: BLOKLAND, Arie et al.; Algemeen Octrooi- en Merkenbureau, P.O. Box 645, NL-5600 AP Eindhoven (NL).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
29 April 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF PREPARING A SILICATE-BASED FOAM, FOAM OBTAINED BY USING SUCH A METHOD AS WELL AS THE USE THEREOF

(57) Abstract: The present invention relates to a method of preparing a silicate-based foam, a foam obtained by using such a method as well as the use thereof. The object of the present invention is to provide a silicate-based foam, which foam has a short drying time and which can be worked after a short time already.

WO 2004/018382 A3

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00594

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C04B28/26 C04B38/10 B01F5/04 B01F3/04 B28C5/02
B28C5/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C04B B28C B01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 32 44 523 A (HENKEL KGAA) 7 June 1984 (1984-06-07) page 6, line 13 - line 24	11-15, 17
A		1, 4, 5, 10
X	US 5 714 000 A (WELLEN GREG R ET AL) 3 February 1998 (1998-02-03) example 2	11, 12
X	CHEMICAL ABSTRACTS, vol. 88, no. 2, 9 January 1978 (1978-01-09), Columbus, Ohio, US; abstract no.: 11073u, XP0000063196 abstract & JP 52 078921 A (J.KIMURA) 2 July 1977 (1977-07-02)	11, 12, 15, 17, 19
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

4 March 2004

Date of mailing of the international search report

10/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Theodoridou, E

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00594

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 288 106 A (PUMPTech NV ; SCHLUMBERGER CIE DOWELL (FR)) 26 October 1988 (1988-10-26) column 3, line 35 - column 4, line 25 -----	1,2,5, 10,12, 15,19
A	FR 2 130 680 A (SHIMIZU KEISUKE) 3 November 1972 (1972-11-03) claims -----	11,17,20

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00594

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 3244523	A	07-06-1984	DE 3244523 A1	07-06-1984
			DE 3374000 D1	12-11-1987
			EP 0110328 A2	13-06-1984
			US 4533490 A	06-08-1985
US 5714000	A	03-02-1998	AU 716778 B2	09-03-2000
			AU 2752497 A	26-11-1997
			AU 715235 B2	20-01-2000
			AU 4107999 A	23-09-1999
			BR 9709059 A	04-01-2000
			CA 2253198 A1	13-11-1997
			CN 1216971 A	19-05-1999
			EP 0897377 A1	24-02-1999
			IL 126684 A	20-05-2001
			JP 2000513691 T	17-10-2000
			TW 415927 B	21-12-2000
			US 2003097966 A1	29-05-2003
			WO 9742131 A1	13-11-1997
			US 6114280 A	05-09-2000
			US 6375735 B1	23-04-2002
			US 6409817 B1	25-06-2002
			US 5858911 A	12-01-1999
JP 52078921	A	02-07-1977	NONE	
EP 0288106	A	26-10-1988	US 4797003 A	10-01-1989
			CA 1280107 C	12-02-1991
			DE 3886253 D1	27-01-1994
			DE 3886253 T2	07-04-1994
			EP 0288106 A2	26-10-1988
			NO 881726 A	24-10-1988
FR 2130680	A	03-11-1972	DE 2214230 A1	12-10-1972
			FR 2130680 A5	03-11-1972
			GB 1396363 A	04-06-1975